

SUNNY BOY 5000US / 6000US / 7000US

- > UL 1741/IEEE-1547 compliant
- > 10 year standard warranty
- > Highest CEC efficiency in its class
- > Integrated load-break rated lockable DC disconnect switch
- > Integrated fused series string combiner
- > Sealed electronics enclosure & Opticool™
- > Comprehensive SMA communications and data collection options
- > Ideal for residential or commercial applications
- > Sunny Tower compatible



SUNNY BOY 5000US / 6000US / 7000US

The best in their class

Our US series inverters utilize our latest technology and are designed specifically to meet IEEE-1547 requirements. Sunny Boy 6000US and Sunny Boy 7000US are also compatible with the Sunny Tower. Increased efficiency means better performance and shorter payback periods. All three models are field-configurable for positive ground systems making them more versatile than ever. With over 750,000 fielded units, Sunny Boy is the benchmark for PV inverter performance and reliability throughout the world.




Technical Data

SUNNY BOY 5000US / 6000US / 7000US

	SB 5000US	SB 6000US	SB 7000US
Recommended Maximum PV Power (Module STC)	6250 W	7500 W	8750 W
DC Maximum Voltage	600 V	600 V	600 V
Peak Power Tracking Voltage	250-480 V	250-480 V	250-480 V
DC Maximum Input Current	21 A	25 A	30 A
DC Voltage Ripple	< 5%	< 5%	< 5%
Number of Fused String Inputs	3 (inverter), 4 x 20 A (DC disconnect)	3 (inverter), 4 x 20 A (DC disconnect)	3 (inverter), 4 x 20 A (DC disconnect)
PV Start Voltage	300 V	300 V	300 V
AC Nominal Power	5000 W	6000 W	7000 W
AC Maximum Output Power	5000 W	6000 W	7000 W
AC Maximum Output Current (@ 208, 240, 277 V)	24 A, 21 A, 18 A	29 A, 25 A, 22 A	34 A, 29 A, 25 A
AC Nominal Voltage Range	183 - 229 V @ 208 V 211 - 264 V @ 240 V 244 - 305 V @ 277 V	183 - 229 V @ 208 V 211 - 264 V @ 240 V 244 - 305 V @ 277 V	183 - 229 V @ 208 V 211 - 264 V @ 240 V 244 - 305 V @ 277 V
AC Frequency: nominal / range	60 Hz / 59.3 - 60.5 Hz	60 Hz / 59.3 - 60.5 Hz	60 Hz / 59.3 - 60.5 Hz
Power Factor (Nominal)	0.99	0.99	0.99
Peak Inverter Efficiency	96.8%	97.0%	97.1%
CEC Weighted Efficiency	95.5%	95.5% @ 208 V 95.5% @ 240 V 96.0% @ 277 V	95.5% @ 208 V 96.0% @ 240 V 96.0% @ 277 V
Dimensions: W x H x D in inches	18.4 x 24.1 x 9.5	18.4 x 24.1 x 9.5	18.4 x 24.1 x 9.5
Weight / Shipping Weight	141 lbs / 148 lbs	141 lbs / 148 lbs	141 lbs / 148 lbs
Ambient Temperature Range	-13 to 113 °F	-13 to 113 °F	-13 to 113 °F
Power Consumption: standby / nighttime	< 7 W / 0.1 W	< 7 W / 0.1 W	< 7 W / 0.1 W
Topology	Low frequency transformer, true sinewave	Low frequency transformer, true sinewave	Low frequency transformer, true sinewave
Cooling Concept	OptiCool™, forced active cooling	OptiCool™, forced active cooling	OptiCool™, forced active cooling
Mounting Location: indoor / outdoor (NEMA 3R)	●/●	●/●	●/●
LCD Display	●	●	●
Lid Color: aluminum / red / blue / yellow	●/○/○/○	●/○/○/○	●/○/○/○
Communication: RS485 / wireless	○/○	○/○	○/○
Warranty: 10-year	●	●	●
Compliance: IEEE-929, IEEE-1547, UL 1741, UL 1998, FCC Part 15 A & B	●	●	●

Efficiency Curves

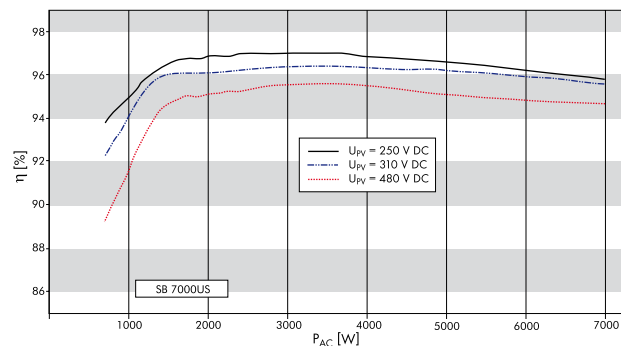

www.SMA-America.com
 Phone 916 625 0870
 Toll Free 888 4 SMA USA

SMA America, Inc.

SUNNYBOY5670US092615 Sunny Boy and SMA are registered trademarks of SMA Solar Technology AG. Text and figures comply with the state of the art applicable when printing. Subject to technical changes. We accept no liability for typographical and other errors. Printed on chlorine-free paper.